

NEIL MARINE

NM 23 FT PASSENGER BOAT

SHELTERED WATERS OPERATIONAL PASSENGER TRANSPORT BOAT

TECHNICAL SPECIFICATION


Length Overall	23 Ft. 05 Inches (7.14 Meters.)
Beam	06 Ft. 06 Inches (1.99 Meters).
Draft (Unloaded)	05 Inches (0.13Meters)
Displacement (Light)	650 Kilograms.
Recommended OBM	40 HP
Passenger capacity	08 Persons

FIBRE GLASS HULL AND DECK BONDED AND REINFORCED WITH TRANSVERSE FRAMES & LONGITUDINALS.


PROVEN CHINE HULL DESIGN WITH A FINE FWD.ENTRY AND FLARED BOW FOR SPRAY DEFLECTION.BUOYANY TANK FITTED TO BOW AND EXTRA BUOYANCY FITTED UNDER DECK SIDES

SELF BAILING TRANSOM OUT BOARD MOLTOR WELL PROVIDED AND TRANSOM IS ADDITIONALLY REINFORCED FOR FITTING OF OBM.

LAY OUT 1

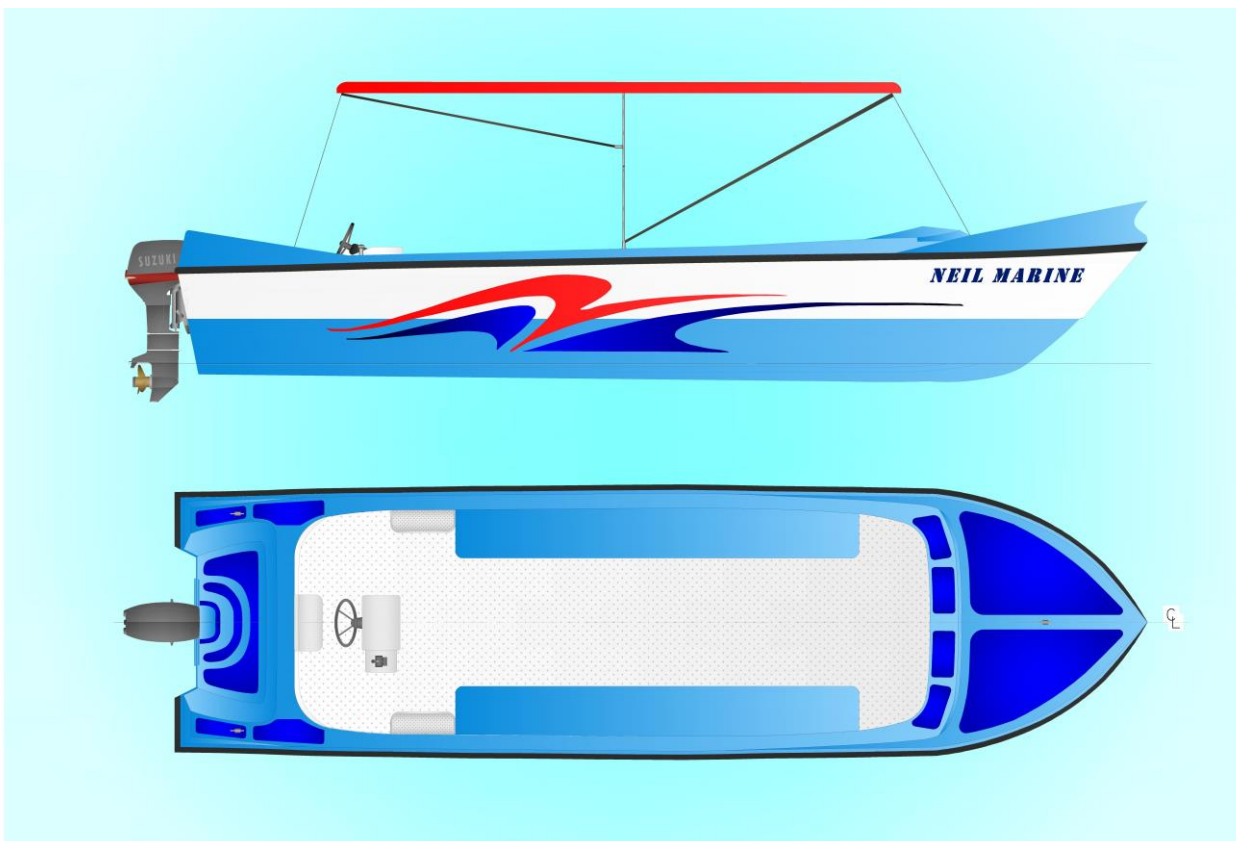

LAY OUT 2

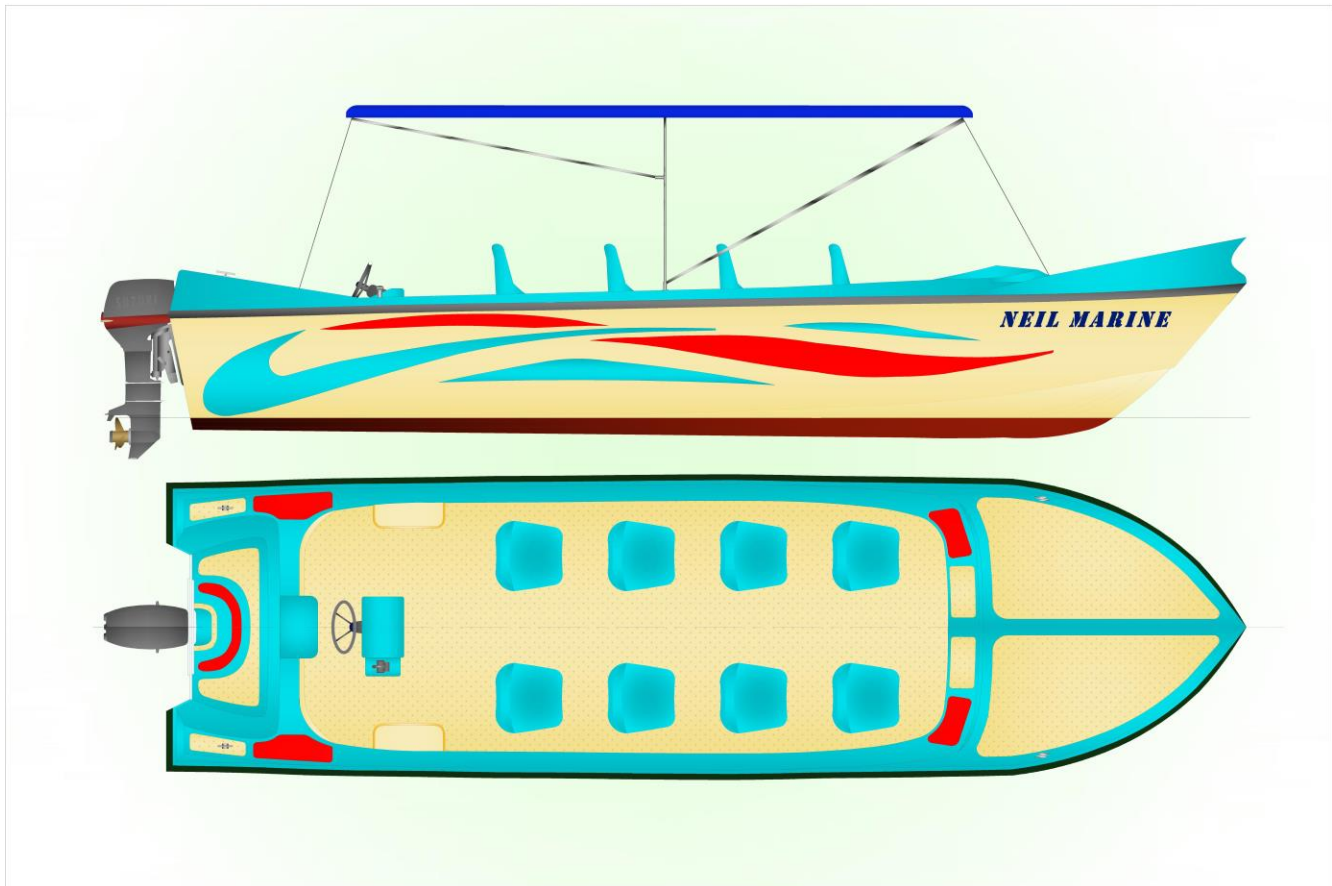

GENERAL ARRANGEMENT

FIBRE GLASS HELM CONSOLE PROVIDED TO AFT WITH STEERING WHEEL ENGINE CONTROLS AND INSTRUMENTS FITTED WITHIN EASY REACH OF THE HELMSMAN. SEAT PROVIDED FOR HELMSMAN.

LAY OUT 01

02 NOS. BENCH TYPE FIBRE GLASS SEATS FITTED FRONT OF HELM TO PORT AND STARBOARD.

LAYOUT 02

06 NOS. INDIVIDUAL FIBRE GLASS BUCKET TYPE SEATS ON PEDASTAL FITTD TO FRONT PORT & STARBOARD

STEP PROVIDED ON PORT AND STARBOARD AFT FOR EASY BOARDING.

REMOVABLE OR SEALED FIBRE GLASS FLOORING FITTED AS REQUIRED

FOLDABLE OR FIXED SUNBRELLA CANVAS CANOPY FITTED ON A STAINLESS STEEL FRAME WORK

DECK FITTINGS

01 NO. STAINLESS STEEL 6 INCH BOW CLEAT

02 NOS.. STAINLESS STEEL 6 INCH BOW CLEAT

03 NOS. BOW AND STERN EYES

MOULDED NON SKID SURFACE ON BOWDECK AND TRANSOM WELL